

## Automatic Voltage Regulator

3000VA  
1500W

4000VA  
2000W

5000VA  
2500W

Alfa Digital PS-3000 | 4000 | 5000


### Features:

- 8pc Outlets for Nema Type; 6pc Outlets for U.K., German or Australian Type
- Automatically Regulation High Voltage and Low Voltage
- Internet, ADSL, Tel/Fax Data Line Surge Protection
- Able to reset Input Overload Protection Circuit Breaker
- User-friendly Visual Indicators Display
- Child Protector




Made in Taiwan

### With Meter:

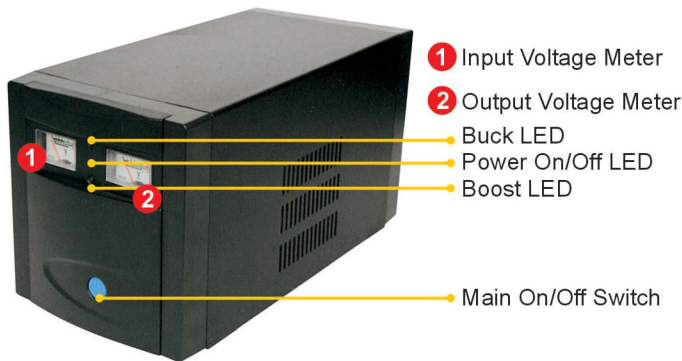

### Rear Panel:

German

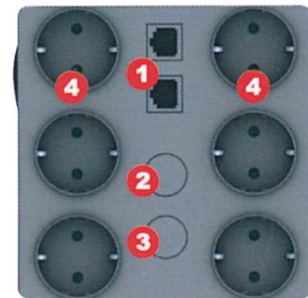

- 1 Internet, ADSL, Fax/Modem Protection
- 2 Input Breaker
- 3 AC Input
- 4 AVR Protection Outlets

### SPECIFICATION

Model	Meter Type	PS-3000M	PS-4000M	PS-5000M
Capacity		3000VA/1500W	4000VA/2000W	5000VA/2500W
AC Input	Normal Voltage	220/230/240VAC		
	Input Voltage Range	161VAC ~ 288VAC (-30%, +25%)		
	Phase	1 Phase 2 Wires		
	Frequency	50Hz		
AC Output	Output Voltage Range	207VAC ~ 253VAC (+/-10%)		
	Frequency	50Hz		
Outlets	AVR	8 German Sockets		
	Network Surge Suppression	RJ-11/RJ-45		
Protection	Overload	Manual Reset Circuit Switch		
	Short Circuit	Manual Reset Circuit Switch		
Environment	Audible Noise	< 40dB at 1M		
Physical	Dimension(D*W*H*)	250*150*157mm		
Design, Manufacture, Services		ISO 9001-2000		
Warranty		1 year		

THE COMPLETE PROTECTION

